


The Morgan Rushworth Circle Cutting Machines are manufactured with a rigid steel frame, suitable for production cutting. The smaller machines feature manual adjustment of the upper cutter, while the powerful PCC 2000/5.0 model benefits from not only hydraulic cutter adjustment but also hydraulic clamping of the sheet. The standard machine configuration allows the cutting of both standard circles and internal diameters to produce flanges.

Machine Features

- Steel welded frame
- High quality cutters
- PCC 1000/2.0 & PCC 1200/3.5 - Manual adjustment of upper cutter
- PCC 2000/5.0 - Hydraulic adjustment of upper cutter
- PCC 1000/2.0 - Manual sheet clamping
- PCC 1200/3.5 - Pneumatic sheet clamping
- PCC 2000/5.0 - Hydraulic sheet clamping
- Attachments to allow internal diameters for flanges
- Braked motor
- Central lubrication system
- Mobile control panel



WATCH THE
MANUAL CIRCLE
CUTTER IN ACTION

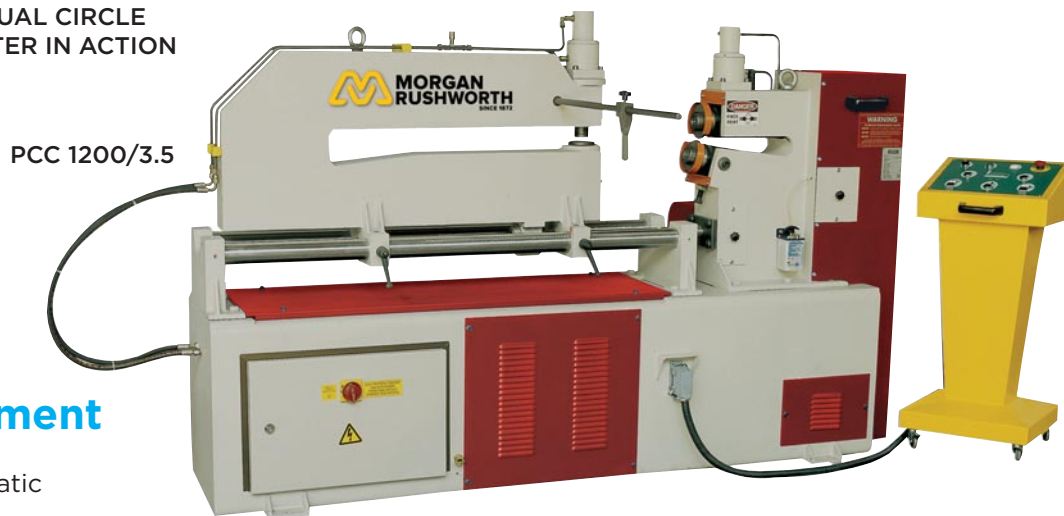

Optional Equipment

- PCC 1000/2.0 - Pneumatic sheet clamping

TECHNICAL SPECIFICATIONS

MODEL STOCK CODE		PCC 1000/2.0 M7015	PCC 1200/3.5 M7017	PCC 2000/5.0 M7022
Capacity	mm	2.0	3.5	5.0
Minimum Circle Diameter	mm	180	200	250
Maximum Circle Diameter	mm	1000	1200	2000
Cutting Speed	m/min	7.5	6.1	4.1
Throat Depth - Body	mm	280	250	300
Throat Depth - Arm	mm	700	750	1200
Motor Power	kW	1.1	2.2	2.2
Length	mm	1400	2000	3000
Width	mm	400	600	750
Height	mm	1150	1400	1400
Weight	kg	350	750	1350