




## H-Frame Press HFPV

The HFPV H frame presses are ideal for a whole variety of bending, forming, pressing and straightening operations. These models include all the features of the popular HFP models with the addition of side to side ram movement across the width of the machine. The hydraulic system is equipped with a manometer and a joystick lever to control the operation. A pair of V blocks are supplied as standard equipment.

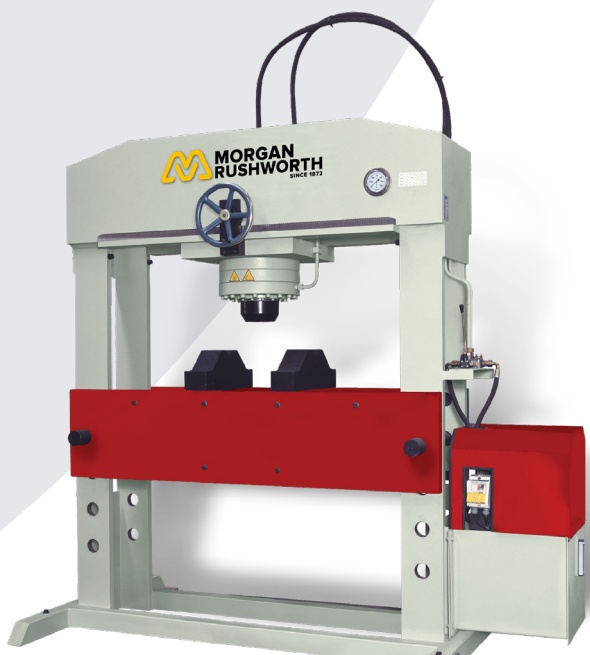

HFPV

XPL 2050.50

### Machine Features


- Easily adjusted bed height with two hardened pins
- Bed designed to accept a variety of supports and jigs according to customer requirements
- Quiet hydraulic system
- Hydraulic cylinder mounted above providing vertical pressure
- Ideal for low or high volume operation.

### Optional Equipment

- Digital Read Out
- Limit Switch
- Hand Pump
- Foot Pedal Control (instead of joystick)
- Foot Pedal Control with Limit Switch (instead of joystick)



**DIGITAL READ-OUT  
(OPTIONAL)**

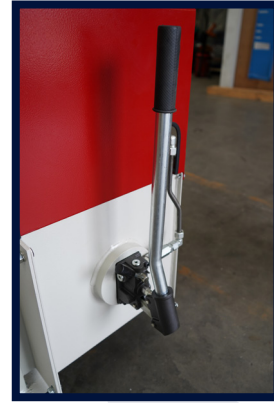

**HAND PUMP  
(OPTIONAL)**

## TECHNICAL SPECIFICATIONS

MODEL	Stock Code	Power Tonnes	Distance between Frames mm	Stroke mm	Advance Speed mm/sec	Working Speed mm/sec	Return Speed mm/sec	Motor Power kW	Length mm	Width mm	Height mm	Weight kg
HFPV 1570/100	M4507	100	1570	300	8	5	10	5.5	2560	1000	2480	1755
HFPV 1570/150	M4508	150	1570	300	9	5	10	11	2560	1000	2480	2350
HFPV 1900/200	M4509	200	1900	300	10	5	20	15	2460	1600	2700	4800

**WATCH THE  
MACHINE IN  
ACTION**

