

## STERLING

### 280 Double Mitre Pull Down Bandsaws



**Sterling 280**

The Sterling 280 offers double mitring, up to 60°, a coolant system and a cast bow construction.

This versatile saw has 2 cutting speeds in the 415v version, and variable blade speeds on the 240v model, ideal for efficient cutting of different metals.

The range of Sterling Pull Down Bandsaws are fast cutting, quiet running and ideal for sawing mild steel and stainless steel materials. They are double mitring with a quick release vice resulting in a good all round saw for the fabrication and engineering markets.

#### Machine Features


- Gravity downfeed (hydraulic)
- Specialised horizontal bandsaw
- With cooling pump for prolongation of the saw blade life
- Scale for mitring vice and graduation
- Stand for safe use
- Double Mitre
- Dual blade speed (415v Model)
- Variable blade speed (240v Model)



**FLOOD COOLANT SYSTEM**



**BLADE TENSION INDICATOR**

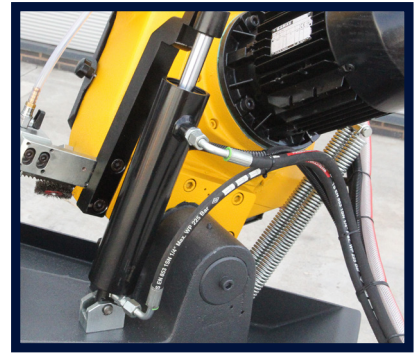

**BLADE AUTO STOP**



**CONTROLLER (415V)**



**INVERTER MOTOR (240V)**



**MOTOR (415V)**

**WATCH THE MACHINE IN ACTION**



## TECHNICAL SPECIFICATIONS

MODEL		280 (415v)				280 (240v)
Capacity		0°	45°	60°	-45°	(Same as 415v)
	○ mm	225	130	90	150	(Same as 415v)
	□ mm	200	130	90	150	(Same as 415v)
	▭ mm	245 x 150	140 x 100	90 x 110	145 x 215	(Same as 415v)
Bed Height	mm	935				935
Blade Size	mm	2480 x 27 x 0.9				2480 x 27 x 0.9
Cutting Speed	m/min	45/90				Variable (20-90)
Motor	Kw	1.1				1.1
Length	mm	1500				1500
Width	mm	510				510
Height	mm	1570				1570
Weight	Kg	295				295
Operation		Pull Down / Auto Down Feed				Pull Down / Auto Down Feed
Vice		Manual				Manual