

STERLING

SVR Vertical Bandsaws

Sterling offer a wide range of sawing solutions including circular saws, horizontal bandsaws, twin column bandsaws and the SVR range of vertical bandsaws. The SVR range consists of four models of varying throat capacities and are all equipped with blade shear, blade welder and grinder as standard equipment.

The blade can be as narrow as 3mm, which is ideally suited to producing curved shapes and extends to 16mm, which together with the adjustable fence is perfect for straight cutting. With additional guards, the blade can be extended to accommodate up to 27mm.



**Sterling
SVR500**



**Sterling
SVR1000**

Machine Features (SVR400, SVR500 and SVR600)



- Wide range of blade widths
- Swarf brush
- Low voltage work light
- Adjustable fence for straight cutting
- Variable protractor fence for angle cutting
- Inclinable table - 5 degrees left and 15 degrees right
- Variable 2 speed motor

(SVR1000)

- Accepts blade widths from 3 to 16mm
- Variable cutting speed
- Swarf removal brush
- Integrated blade welder and grinder
- Low voltage working light

Optional Features (SVR1000 Only)

- Rip fence
- Mitre fence

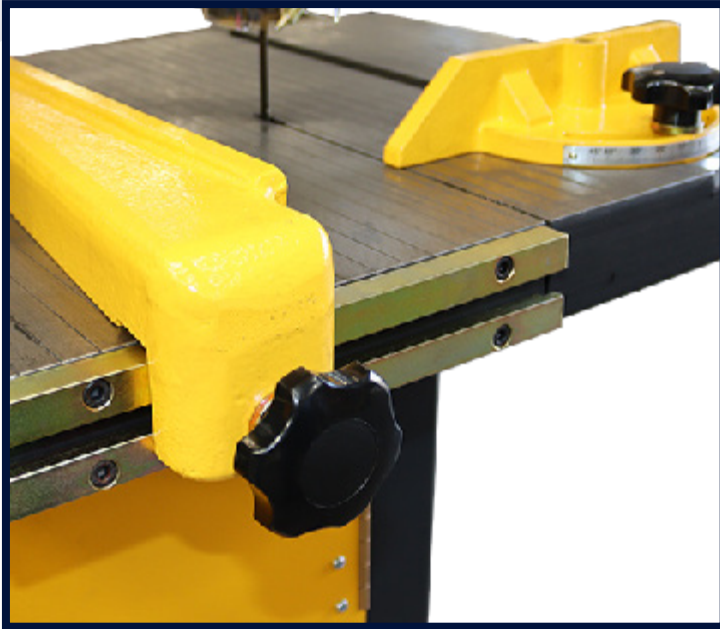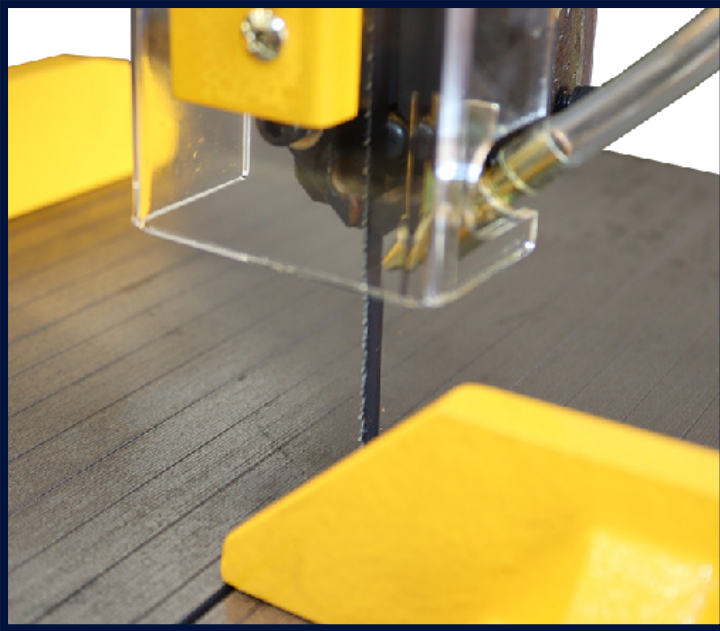

TECHNICAL SPECIFICATIONS

MODEL		SVR400	SVR500	SVR600	SVR1000
Stock code		15456	15457	15458	15459
Cutting height	mm	300	310	340	340
Cutting depth	mm	410	520	610	1010
Bed Height	mm		995		995
Table size	mm	600 x 500	600 x 500	600 x 500	Front: 600 x 500 Rear: 450 x 500
Cutting speed	m/min	20 - 500	20 - 500	20 - 500	20 - 500
Blade length	mm	3350	3880	3970	4540
Blade width	mm	3.0 - 16 (Welded) 3.0 - 27 (Unwelded)	3.0 - 16 (Welded) 3.0 - 27 (Unwelded)	3.0 - 16 (Welded) 3.0 - 27 (Unwelded)	3.0 - 16 (Welded) 3.0 - 27 (Unwelded)
Motor	Kw	1.5	1.5	1.5	1.5
Length	mm	1200	1300	1420	1770
Width	mm	760	760	760	760
Height	mm	2100	2140	2140	2140
Weight	Kg	440	500	700	800